


FLC-BTM808

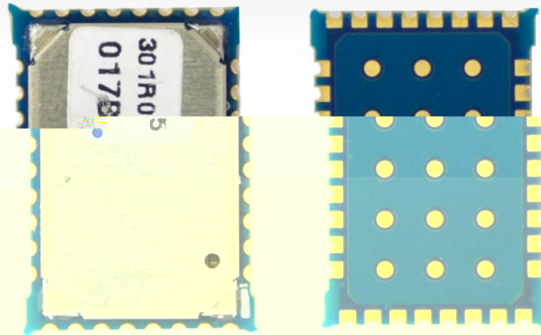

概述:

FLC-BTM808是双模蓝牙HCI模块，OEM厂商可以通过模块增加蓝牙无线功能到产品中。模块支持BT3.0-HS和BT4.0（蓝牙低功耗

Description:

FLC-BTM808 is a dual-mode Bluetooth HCI module that allows OEM to add Bluetooth wireless capability to their products. The

蓝牙增强型数据速率（EDR），支持高达3Mbps的数据传输速率。

designers can easily customize their applications to support different Bluetooth profiles, such as HS/HF, A2DP, AVRCP, OPP, DUN, SPP, and etc. The module supports Bluetooth® Enhanced Data Rate (EDR) and delivers up to 3 Mbps data rate.

优势:

- ◆ 双模 BT4.0, BT3.0和BT2.1+EDR
- ◆ 汽车级
- ◆ 2Mbps的和3Mbps的EDR支持
- ◆ 全速（12Mbps）USB 2.0接口
- ◆ 可编程波特率高达4Mbps的UART接口
- ◆ 两个PCM / I2S数字音频接口
- ◆ 通过CE / FCC / CE认证
 - ◆ 高质量、高性能

Advantage:

- ◆ Dual-mode BT4.0, BT3.0, BT 2.1+EDR
- ◆ Automotive grade
- ◆ 2Mbps and 3Mbps EDR support
- ◆ Full-speed (12Mbps) USB 2.0 interface
- ◆ Full-speed (12Mbps) USB 2.0 interface
- ◆ UART interface with programmable baud rate up to 4Mbps
- ◆ RoHS/CE/CF Certified
- ◆ High quality and performance.

特点:

- ◆ 蓝牙v2.1 + EDR, class1.5
- ◆ 蓝牙V3.0-HS, class1.5
- ◆ 蓝牙V4.0低功耗连接
- ◆ 7dBm Rf发射功率由平控

Feature:

- ◆ Bluetooth v2.1+EDR, Class 1.5

应用:

Application: